

BDJ NEXT

FIBER BLOWING MACHINE

NEW




OUR TECHNOLOGY, YOUR SUCCESS



The BDJ NEXT cable blowing machine is an extension of our bestseller, BDJ EXTENDED, featuring a new and improved blowing head called the "M" Head.


WORK RANGE:

- **CABLE Ø 2,5 – 12 mm**
- **MICRODUCT Ø 7, 10, 12, 14, 16, 20 mm**

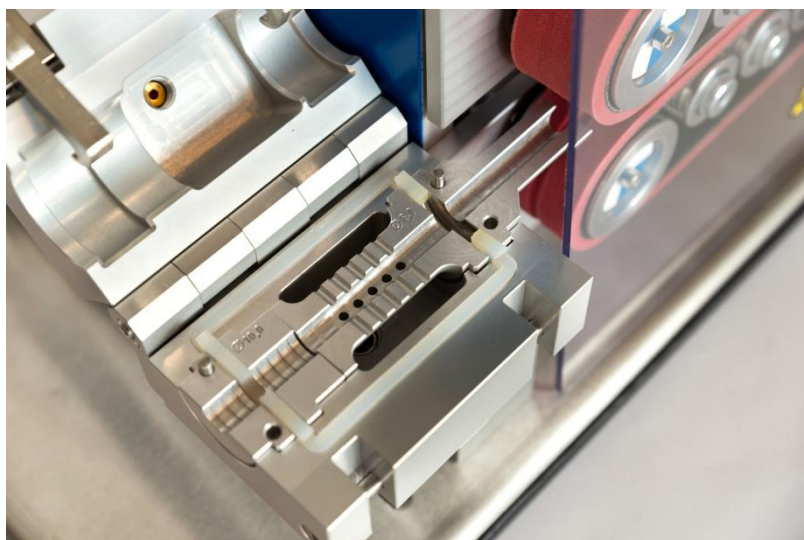

What's New In the „M” Head?

- **Tool-Free Operating System** – No additional tools required for operating blowing head.
- **Quick Setup** – The manually closed head with a lever is ready to work within seconds!
- **Improved Sealing** – A specially designed sealing system ensures better airtightness.
- **Extended Guide Bushings** – Specially milled sections for feeder belts help prevent cable breakage both inside the head and at the entry point.
- **Optimized Airflow** – Special nozzles inside the cable guide bushing distribute air evenly around the cable inside the head.
- **Adjustable Head Support** – A specially designed support system allows for easier and more precise height adjustment of the head in relation to the feeder.

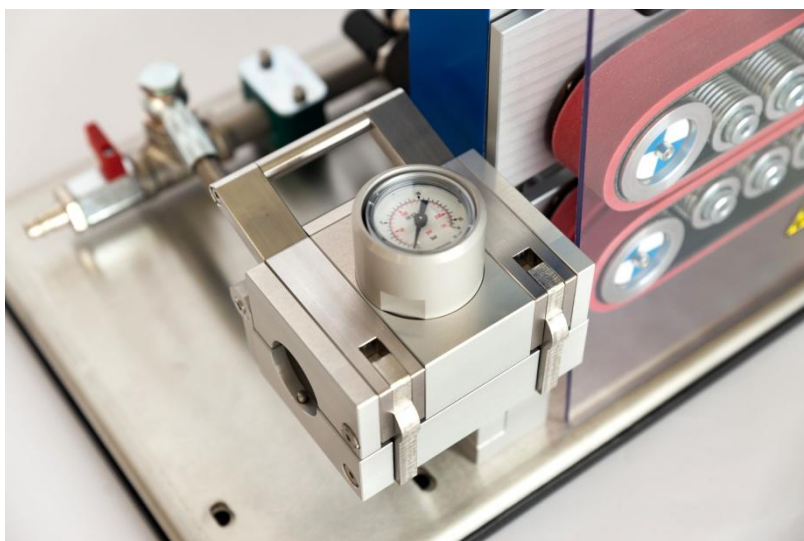

TECHNICAL DATA:

SUPPORTED CABLES:	2,5 – 12 mm
SUPPORTED MICRODUCTS:	7, 10, 12, 14, 16, 20 mm
BLOWING DISTANCE:	UP TO 3500 m!
BLOWING SPEED:	more than 120 m/min
MAXIMUM OPERATING PRESSURE:	15 bar
MACHINE DIMENSIONS: (L x W x H)	580 X 300 X 320 mm; weight 20 kg
DIMENSIONS WITH TRANSPRT CASE: (L x W x H)	640 X 390 X 410 mm; weight 33 kg
REQUIRED COMPRESSOR CAPACITY:	min. 1m ³ /min, 15 bar
RECOMMENDED COMPRESSOR:	KAESER M17A, ATMOS PB82

INCLUDED IN THE SET

COMPLETE SET OF SEALS FOR CABLE AND MICRODUCT	Seal Dimensions for cable (mm) 2.5, 3.5, 4, 5, 6, 7, 8, 8.5, 9, 9.5, 10, 11, 12 Seal Dimensions for Microduct (mm): Integrated with the bushings!
COMPLETE SET OF BUSHINGS FOR CABLE AND MICRODUCT	Cable bushing (mm) 4, 6, 8, 10, 14 Microducts bushing: (mm) 7, 10, 12, 14, 16, 20
CALIBRATION BALL SET	3, 5, 7, 8, 10 mm
AIR HOSE (3/4")	10 meters
PRELUBE 5000 LUBRICANT	240 ml
SAMPLE OF PNEUMATIC OIL	250 ml
MICRODUCT CUTTER	1 pcs